

# Installation Manual for PV Optimization

Last Change: 2022-07-28

- [Introduction](#)
  - [Assumptions](#)
  - [Shopping List](#)
- [Installation for iWattController or SmartPi delivered after July 2021](#)
  - [Install the iWattController or SmartPi hardware according to this installation procedure:](#)
  - [Install the Watt Analytics App on your Apple or Android smart phone](#)
  - [Login to Watt-analytics cloud](#)
  - [Install meter](#)
- [Assign static IP to iWattController or SmartPi](#)
- [Configure Solar production measurement](#)
  - [Option 1: 3rd party PV Inverter integration](#)
  - [Option 2: measurement PV production with iWattMeter](#)
    - [Install the iWattMeter](#)
    - [Connect the iWattMeter to the iWattController](#)
  - [Controller measures Grid power](#)
  - [Option: connect multiple PV inverters](#)
- [Battery installation](#)
- [Wallbox installation](#)
  - [Create a device for your vehicle charging power usage](#)
  - [Register the wall-box](#)
- [Switch Installation](#)
  - [Shelly switch](#)
- [Relay configuration](#)
- [Tips](#)

## Introduction

### Assumptions

- You run one or two PV installations with Fronius, Kostal Piko Solar converter or any other PV-inverter measured with an additional iWattMeter
- You have a electrical consumption that does not exceed 100 Ampere per phase
- You want to optimize the own power consumption of your PV production, by switching water boiler and electrical heating with the Watt Analytics PV Optimizer
- You have a WiFi reachable with good signal strength in your circuit breaker compartment and the locations where the switchable devices are located
- You optionally have a wall box for electrical vehicle charging of type Go-E or Keba
- You optionally have a battery installed of type Senec or any type connect to Kostal or Fronius PV inverters

### Shopping List

You need item 1 from the list below and depending on your PV Inverter and devices you want to control items 2 and 3

1. Package Control S, with Premium IoT Cloud: <https://watt-analytics.com/en/general/package3/> consists of iWattController or SmartPi + 4 x Current transformer 100 Amp
2. Shelly Plug, Shelly Plug S or Shelly 1PM for each device
3. Optional for PV-inverters other than Fronius, Kostal Piko: Package S for an additional iWattMeter to measure PV production

## Installation for iWattController or SmartPi delivered after July 2021

**Install the iWattController or SmartPi hardware according to this installation procedure:**

### Install the Watt Analytics App on your Apple or Android smart phone

You can find and install Watt-analytics App in App Store (iOS) or Google Play (Android) on your phone.

If you have QR code reader on your phone, you can use images below:





## Login to Watt-analytics cloud

After app is installed on your phone, you will see the login screen. If you already have a watt-analytics account, fill the form and press login. Otherwise tap on 'Register' at the bottom.

  
**Log into Watt Analytics**  
Control how you use energy and keep track of your personal energy consumption.

Email  
no-reply@watt-analytics.com

Password  
Enter password

**LOGIN**

[Forgot your password?](#)

Don't have an account? [Register](#)

## Register a new account:

  
**Register into Watt Analytics**  
Control how you use energy and keep track of your personal energy consumption.

First name  
John

Last name  
Doe

Email  
no-reply@watt-analytics.com

Password  
enter password


Confirm password  
confirm password

I agree to [Data Protection](#), [Terms and Conditions](#) and to share data in an anonymized form with Watt Analytics customers and partners.


**REGISTER**

## Install meter

After successful login, you need to register your meter under your account. In this regard, tap on `Add new watt-meter` and follow the instructions provided by the app step by step.

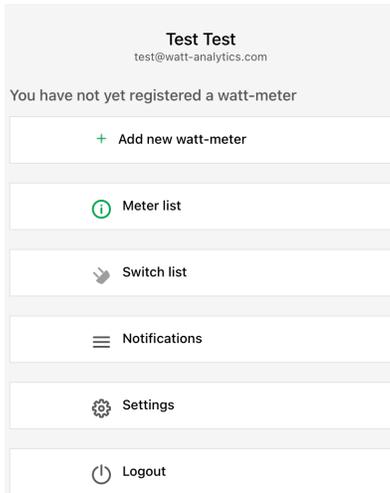

When your meter is installed successfully, you can see your consumption and solar production on main graph.

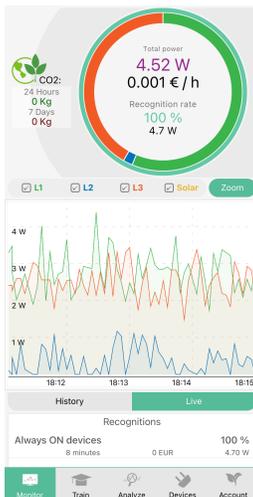

## Assign static IP to iWattController or SmartPi

Access the configuration UI of your Internet Modem or router.

In the DHCP or Clients section look up MAC address and current IP address of iWattController or SmartPi, this should look like the following entry:

○	iwattcontroller	B8:27:EB:40:BB:7B	192.168.0.171/24	00:23:45:57
---	-----------------	-------------------	------------------	-------------

In the DHCP section create a reserved IP address for the iWattController or SmartPi, for most modems you can keep the same IP the iWattController or SmartPi has right now:

## Add reserved rule

MAC address  :  :  :  :  :  (example: 01:23:45:67:89:AB)

IP address 192.168.0.

Add rule

After that the entry has to show up in the reserved list:

### Reserved list

MAC address	IP address	Delete
B8:27:EB:18:FD:8F	192.168.0.165	<input type="checkbox"/>
B8:27:EB:27:85:54	192.168.0.158	<input type="checkbox"/>
B8:27:EB:53:87:9A	192.168.0.150	<input type="checkbox"/>
B8:27:EB:40:BB:7B	192.168.0.171	<input type="checkbox"/>

## Configure Solar production measurement

### Option 1: 3rd party PV Inverter integration

On the Web app navigate to menu homes, select your home and open the Site-Configuration tab.

When you make changes on this tab your controller will be notified and automatically reconfigure itself, based on your settings.

You can observe this process with the status indicator, which in the picture "UP: 4 hours startup completed"

The status traffic lights for each switch and meter tell you if the connections work and the meter / switch is sending data = green bubble, no data = red bubble, few data = yellow bubble.

Watt Analytics > Homes > Detail

Home detail - St Wolfgang (0.2 Eur/kWh)

Watt Analytics > Homes > Detail

Meters Users in home Site Configuration

Controller: THT-StW SmartPi1

UP: 4 hours startup completed

Switches installed: 5/0 + Add new switch					Production: + Add new meter				Grid: + Add new meter			
Status	Model	Name	Device	Actions	Status	Type of meter	Meter's name	Actions	Status	Type of meter	Meter's name	Actions
●	Iono	Boiler Iono	E-Auto Tesla	 	●	froniusSolarapiV1	Fronius Symo1	 				

To configure solar production measurement, press Add new meter in the Production section

### Edit meter details - Fronius Symo1 X

\* Type of meter:

froniusSolarapiV1

\* Meter's name:

Fronius Symo1

Mac Address:

IP Address:

192.168.1.8

Reading per 1 minute:

30

\* Purpose:

Pv

Controller:

THT-StW SmartPi1

In meter type select the type that matches your PV Inverter type. Please contact [support@watt-analytics.com](mailto:support@watt-analytics.com) if your PV Inverter type is missing in the list. Enter a name for the meter and the IP address of the PV Inverter. Please make sure that this IP address is also statically assigned.

Readings per minute shall be set to 30, Purpose = Pv and Controller to the name of your controller (iWattController or SmartPi)

## Option 2: measurement PV production with iWattMeter

### Install the iWattMeter

Get the iWattMeter installed by an electrician to measure your PV Production.

Register the iWattMeter in your Watt Analytics account and verify in the dashboard that the correct values are measured. In many cases this should 1/3 of the total production of your PV System on each of the 3 phases. Make sure that the measured values are positive. Change the CT direction if necessary.

### Connect the iWattMeter to the iWattController

For the following section where terminal commands have to be entered you need to open the "Terminal" app in MacOS or the "Cmd" App on Windows and enter the commands like "ssh" there.

Configure the iWattController or SmartPi to read and process the data of your iWattMeter:

#### set smartpi mqtt credentials

```
ssh pi@<IP of iWattController / SmartPi>
sudo systemctl stop wa-pi.service
java -jar /usr/local/bin/wa-pi.jar pvInverterType=iwattmeter
```

- check the console log that no errors occur
- Press <Ctrl>-C to interrupt the process

#### restart wa-pi.service

```
sudo systemctl start wa-pi.service
journalctl -f -u wa-pi.service
```

- check the console log that no errors occur

Configure you iWattMeter to send data to the iWattController or SmartPi. Make sure that you have given your iWattController a static IP address as described above. Find the IP address of the iWattMeter on your router or with a tool like LanScan.

- connect to the web frontend of the iWattMeter with your browser on the IP address you just found. Get login information from support@watt-analytics.com
- go to the "MQTT Configuration" page

- Take the above values out of the wa-pi.properties from the iWattController or the WebApp Home menu
- Make sure the the Secure (SSL/TLS) option is switched OFF
- Press SUBMIT
- Press RESTART DEVICE

Check that you solar production is displayed in the web and mobile app after a few seconds

If you are installing the iWattMeter in a network company network or larger home network, please assign a static IP address to the iWattMeter and make sure to use the correct netmask e.g. 255.255.254.0

## Controller measures Grid power

Use this option if you have a solar installation where the solar production is merged into your power network between the consumers. In such a setup it's not possible to measure pure consumption, but you would install the Watt Analytics power meter close to the utility power meter and measure the mix of production and consumption. To be able to see the total consumption independent of your production, you set the Usage field of your controller to Grid:

Edit meter details - THT-StW SmartPi1 ✕

\* Type of meter :

\* Meter's name :

Mac Address :

IP Address :

Reading per 1 minute :

\* Purpose :

Controller :

check you consumption curve in the web app, it should show all positive values (before they were negative, when you production was higher than the consumption)

### Option: connect multiple PV inverters

Proceed like described above, the sum of the inverters will be displayed in the app.

### Battery installation

To configure battery soc and watt measurement, press Add new meter in the Storage section

**Add new meter device**
✕

---

\* Type of meter :

SENEChome ▼

\* Meter's name :

Senec

Mac Address :

IP Address :

192.168.1.8

Reading per 1 minute :

30

\* Purpose :

Battery ▼

Controller :

THT-StW SmartPi1 ▼

---

Cancel
Save

In meter type select the type that matches your battery type. Please contact [support@watt-analytics.com](mailto:support@watt-analytics.com) if your battery type is missing in the list. Enter a name for the meter and the IP address of the PV Inverter. Please make sure that this IP address is also statically assigned.

Readings per minute shall be set to 30, Purpose = Battery and Controller to the name of your controller (iWattController or SmartPi)

## Wallbox installation

### Create a device for your vehicle charging power usage

←
**Home detail - St Wolfgang (0.2 Eur/kWh)**

Watt Analytics > Homes > Detail

Meters
Users in home
Site Configuration

+ Add new meter

ID	Meter's name	Mac Address	Reading per 1 minute	Type of meter	Subscription type	Subscription until	Purpose	Actions
+	1015	Fronius Symo1	30 / per min.	froniusSolarapiV1	BASIC	---	Pv	<span style="font-size: 12px; color: #0070c0;">⚙️</span> <span style="background-color: #008000; color: white; padding: 2px 5px; border-radius: 3px; font-weight: bold; margin-left: 5px;">+ Add device</span> <span style="font-size: 12px; color: #0070c0; margin-left: 5px;">✎</span> <span style="font-size: 12px; color: #ff0000; margin-left: 5px;">🗑</span>
+	2	THT-StW SmartPi1	240 / per min.	SmartPi	PREMIUM	2099-12-31	Usage	<span style="font-size: 12px; color: #0070c0;">⚙️</span> <span style="background-color: #008000; color: white; padding: 2px 5px; border-radius: 3px; font-weight: bold; margin-left: 5px;">+ Add device</span> <span style="font-size: 12px; color: #0070c0; margin-left: 5px;">✎</span> <span style="font-size: 12px; color: #ff0000; margin-left: 5px;">🗑</span>

On the Meters List press the "Add Device" button

## Edit device on current meter - E-Auto Tesla X

**\* Device name :**

**\* Device Type :**

Electric car
▼

**Number of identical instances :**

1

Cancel
Save

Name the device and select "Electric Car" for the device type.

### Register the wall-box

Get you wall-box installed by an electrician and make sure that it works properly with the app of the wall-box.

After that navigate to the Site-Configuration

[Dashboard](#)
[Smart Training](#)
[Reports](#)
[Homes](#)
[Tests](#)

Thomas Hutterer-Tik
Change password
Log out

[←](#) Home detail - St Wolfgang (0.2 Eur/kWh)

Watt Analytics > Homes > Detail

Meters
Users in home
Site Configuration

Controller: THT-StW SmartPI1 ⊞

UP : 4 hours startup completed

Switches installed: 5/0 + Add new switch

Status	Model	Name	Device	Actions
●	Iono	Boller Iono	E-Auto Tesla	<span style="background-color: #28a745; color: white; padding: 2px 5px;">↶</span> <span style="background-color: red; color: white; padding: 2px 5px;">⊞</span>

Production + Add new meter

Status	Type of meter	Meter's name	Actions
●	froniusSolarapiV1	Fronius Symo1	<span style="background-color: #28a745; color: white; padding: 2px 5px;">↶</span> <span style="background-color: red; color: white; padding: 2px 5px;">⊞</span>

Grid + Add new meter

Status	Type of meter	Meter's name	Actions

In the Site-Configuration use the "Add new switch" button to register a wall box.

---

**Edit Switch - Keba-Tesla** X

---

\* Model:

\* Name:

IP Address:

\* Mode:

\* Device:

\* Priority:

\* Phase:

---

Select the wall-box model you have installed. Please contact [support@watt-analytics.com](mailto:support@watt-analytics.com) if your wall-box type is missing in the list. Enter the IP address and make sure, that you have assigned a static IP address to the wall-box.

Choose mode = AUTO to enable loading when you have surplus PV production.

Choose Priority:

- A to enable minimum loading even without PV production
- B to enable loading with PV production only

Choose Phase: depending on the charging speed you want to achieve

- 1 phase: charging with 1,4 kW up to 4,3 kW
- 3 phase: charging with 4,2 kW up to 11 kW

if you have a 5kWp PV installation, the 1 phase is recommended, because you will utilise your production better

## Switch Installation

### Shelly switch

Install Shelly switch hardware

- For Shelly Plug and Shelly Plug S, you can easily connect it to the power socket and use it as an outlet to connect your device.


<b>Shelly Plug</b>	<b>Shelly Plug S</b>
--------------------	----------------------



- For Shelly 1PM, ask you your electrician to install it for you.




- Register your Shelly switch in the App
- In watt-analytics app, tap on `Account` button at bottom then `Switch list`.
- With the `+` button on top, you can register your switch by following the instruction provided by the app step by step.

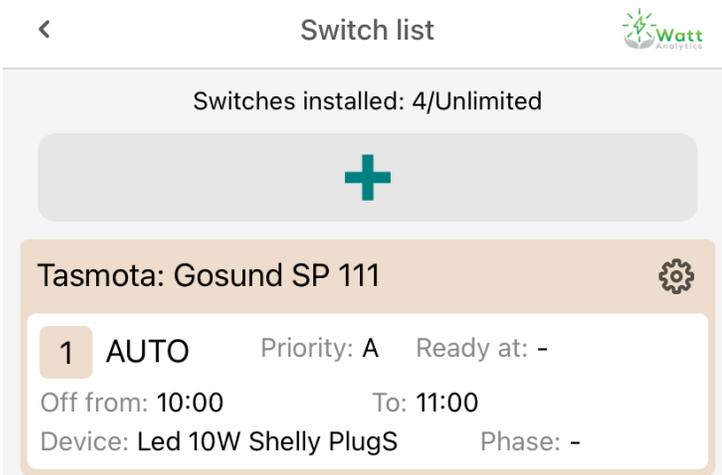

- Configure your switch

- In watt-analytics app, under `Account / Switch list`, you can see list of your registered switches with yellow border containing relays in white. Shelly Plug, Shelly Plug S and Shelly 1PM are single relay switches, so there is only one relay attached to them as you see in the image below:

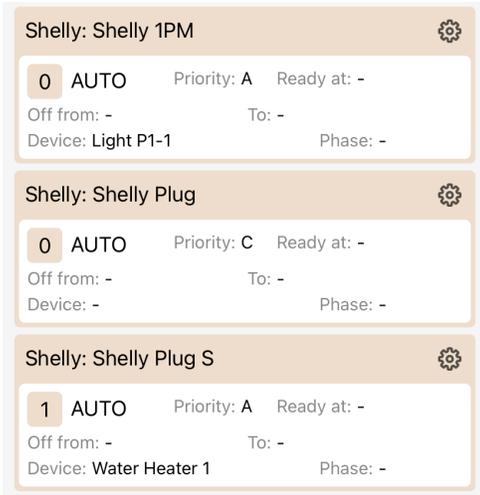

- Use the button on top right of your switch to reconfigure, rename or remove it.
- To assign a device to a relay or change the PV optimiser behaviour, click on relay (white area).

## Relay configuration

Each switch may come with 1 or multiple relays depending on the type. In the below setup page you can configure how the Watt Analytics Software will monitor and control your device through the relay.

The 'Edit Relay' form contains the following fields: 'Mode' (set to 'AUTO'), 'Device' (a dropdown menu with 'Please choose one ...'), 'Priority' (a dropdown menu with 'Please choose one ...'), 'Ready at' (a text input field), 'Switch off from' (a text input field), and 'Switch off to' (a text input field). At the top, there are 'CANCEL' and 'EDIT' buttons.

There are different properties you can set for each relay:

- mode:
  - AUTO: device is being switched on and off automatically by PV-Optimiser based on your solar production
  - ON: device will always have power
  - OFF: device will always be switched off
  - MAN: (MANUAL) PV-Optimiser will not control your device and you can switch it on or off by physical button or another cloud service
- Device:
  - Device you want to be controlled by PV-Optimiser. For example your Water boiler.
- Phase:
  - If your device uses three power lines, the connected phase also need to be defined here otherwise you do not see this property at all.
- Priority:
  - When you have more than one device switchable by PV-Optimiser and solar production is not enough for all of them, it uses this value to power on your priority one.
- Ready at:
  - PV-Optimiser will make sure your device is ready at this time. (Use 24 hour time format like 21:30)
- Switch off from / to:
  - your device will not be switched on at this period. (Use 24 hour time format like 21:30)

## Tips

- If you need to reset a Shelly Plug, please connect the plug to a power socket and hold the button for 10 seconds. Then the LED should flash red briefly and then switch to blue